

Vegetation Control Systems

Manufactured by U-TECK

P.O. Box 2484, Fayetteville, North Carolina 28302


(800) 542-7011 • Fax: (910) 483-0784

WeedEnder.com

Features

- Stainless Steel
- Corrosion-resistant
- Easy to Attach
- Superior Strength
- Will Not Bleed

General Usage: The WeedEnder requires that it be staked in place on all sides according to the U-TECK practice for any particular installation. Use only U-TECK stakes. We have stakes designed for every need. Please contact U-TECK customer service at 1-800-542-7011 for assistance.

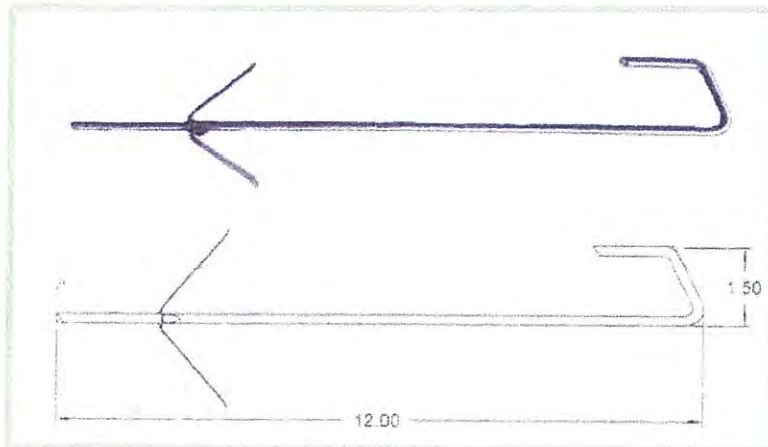

Sand Stake

VPN: 8SASTAKE
(100/box)

This stake is constructed of 316 stainless steel and designed for use in sandy or very loose soil conditions. Anchor on bottom expands as force is applied to remove stake, thereby causing resistance to upward pressure. Additional anchors can be added in extremely sandy soil.



Asphalt Fasteners

VPN: 8AFASST-30, 8AFASST-10, and 8AFASST-5
(Available in boxes of 30 lbs, 10 lbs, and 5 lbs)

This spike is designed to be used when WeedEnder is applied directly to asphalt. Usually it is later covered with crack sealant. Install every 15 inches maximum.

General Purpose Spiral Spike

This hardened steel spiral spike is used for most installations. Its spiral design is driven into position with a standard hammer. The spiral "screw" into most soil conditions and also works well in rocky soils.

8RSPIKE: (unit measure= one box of 100)

